




ROOFING TILE

TITAN® COLLATED BELT SCREWS

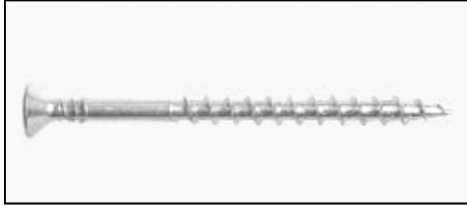

Bugle head coarse thread screw
#2 Phillips drive
Sharp point
Dacro Coating, waxed

BWSP8112D #8 x 1-1/2"
BWSP8134D #8 x 1-3/4"
BWSP8200D #8 x 2"
BWSP8212D #8 x 2-1/2"
BWSP8300D #8 x 3"

Meets or exceeds ASTM 641 Class 1.
 Meets Miami Dade County, Florida,
 Protocol PA114-95, Appendix E, Section 2
 (ASTM G85).

For attaching roof tile to wood.
 Recommended min. 3/4" penetration into
 substrate.



Bugle head coarse thread screw
#2 Phillips drive
Sharp point
TITANGUARD Coating, waxed

BWSP8112TG #8 x 1-1/2"
BWSP8134TG #8 x 1-3/4"
BWSP8200TG #8 x 2"
BWSP8212TG #8 x 2-1/2"
BWSP8300TG #8 x 3"
BWSP9400TG #9 x 4"

Meets or exceeds ASTM 641 Class 1.
 Meets Miami Dade County, Florida,
 Protocol PA114-95, Appendix E, Section 2
 (ASTM G85).

For attaching roof tile to wood.
 Recommended min. 3/4" penetration into
 substrate.



Bugle head coarse thread screw
#2 Square drive
Type 17 point
302 Stainless Steel, waxed

BWSB8112SS2 #8 x 1-1/2"
BWSB8134SS2 #8 x 1-3/4"
BWSB8200SS2 #8 x 2"
BWSB8212SS2 #8 x 2-1/2"
BWSB8300SS2 #8 x 3"

Meets or exceeds ASTM 641 Class 1.
 Meets Miami Dade County, Florida,
 Protocol PA114-95, Appendix E, Section 2
 (ASTM G85).

For attaching roof tile to wood. Type 17
 point provides for better tile penetration.
 Recommended min. 3/4" penetration into
 substrate.



Bugle head coarse thread screw
#2 Square drive
Type 17 point
305 Stainless Steel, waxed

BWSB8112SS5 #8 x 1-1/2"
BWSB8134SS5 #8 x 1-3/4"
BWSB8200SS5 #8 x 2"
BWSB8212SS5 #8 x 2-1/2"
BWSB8300SS5 #8 x 3"

Meets or exceeds ASTM 641 Class 1.
 Meets Miami Dade County, Florida,
 Protocol PA114-95, Appendix E, Section 2
 (ASTM G85).

For attaching roof tile to wood. Type 17
 point provides for better tile penetration.
 Recommended min. 3/4" penetration into
 substrate.

TITAN's Top Drive auto-feed screw fastening system
 offers cost productive solutions for your every application:

- Drywall (wood / steel)
- Steel Framing
- Sub-Flooring
- Decking
- Fiber-Cement
- Roofing

TITAN® belt screws fit :
 Grabber, Hilti, Senco,
 Ryobi, Pam, Makita,
 Milwaukee tools.

TITAN® strip screws fit :
 Quikdrive, Holz-her, tools
TITAN® coil screws fit :
 Muro, Holz-her
TITAN® roll screws fit :
 Hitachi, Max

TITANGUARD® 1500 Series is an acid-resistant, pore-sealing agent chosen to resist corrosive elements.


- Resistant up to 1,500 hours of Salt Spray Tests ASTM B-117
- Resistant to 15 cycles of Acid Rain Test DIN 50018, SFW 2.0L
- All Zinc-plated screws conform to ASTM B-633

All products manufactured for TITAN Fastening Systems are of a non-chemically hazardous nature.



ROOFING TILE

TITAN® BULK SCREWS

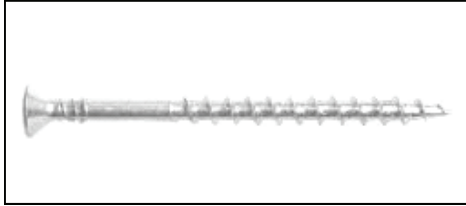

Bugle head coarse thread screw
#2 Phillips drive
Sharp point
Dacro Coating, waxed

08112D #8 x 1-1/2"
 08134D #8 x 1-3/4"
 08200D #8 x 2"
 08212D #8 x 2-1/2"
 08300D #8 x 3"

Meets or exceeds ASTM 641 Class 1.
 Meets Miami Dade County, Florida,
 Protocol PA114-95, Appendix E, Section
 2 (ASTM G85).

For attaching roof tile to wood.
 Recommended min. 3/4" penetration into
 substrate.



Bugle head coarse thread screw
#2 Phillips drive
Sharp point
TITANGUARD Coating, waxed

08112TG #8 x 1-1/2"
 08134TG #8 x 1-3/4"
 08200TG #8 x 2"
 08212TG #8 x 2-1/2"
 08300TG #8 x 3"
 09400TG #9 x 4"

Meets or exceeds ASTM 641 Class 1.
 Meets Miami Dade County, Florida,
 Protocol PA114-95, Appendix E, Section
 2 (ASTM G85).

For attaching roof tile to wood.
 Recommended min. 3/4" penetration into
 substrate.



Bugle head coarse thread screw
#2 Square drive
Type 17 point
302 Stainless Steel, waxed

08112SS2 #8 x 1-1/2"
 08134SS2 #8 x 1-3/4"
 08200SS2 #8 x 2"
 08212SS2 #8 x 2-1/2"
 08300SS2 #8 x 3"

Meets or exceeds ASTM 641 Class 1.
 Meets Miami Dade County, Florida, Pro-
 tocol PA114-95, Appendix E, Section 2
 (ASTM G85).

For attaching roof tile to wood. Type 17
 point provides for better tile penetration.
 Recommended min. 3/4" penetration into
 substrate.



Bugle head coarse thread screw
#2 Square drive
Type 17 point
305 Stainless Steel, waxed

08112SS5 #8 x 1-1/2"
 08134SS5 #8 x 1-3/4"
 08200SS5 #8 x 2"
 08212SS5 #8 x 2-1/2"
 08300SS5 #8 x 3"

Meets or exceeds ASTM 641 Class 1.
 Meets Miami Dade County, Florida,
 Protocol PA114-95, Appendix E,
 Section 2 (ASTM G85).

For attaching roof tile to wood. Type 17
 point provides for better tile penetration.
 Recommended min. 3/4" penetration into
 substrate.

TITAN's Top Drive auto-feed screw fastening system
 offers cost productive solutions for your every application:

- Drywall (wood / steel)
- Steel Framing
- Sub-Flooring
- Decking
- Fiber-Cement
- Roofing

TITAN® belt screws fit :
 Grabber, Hilti, Senco,
 Ryobi, Pam, Makita,
 Milwaukee tools.

TITAN® strip screws fit :

Quikdrive, Holz-her, tools

TITAN® coil screws fit :

Muro, Holz-her

TITAN® roll screws fit :

Hitachi, Max

TITANGUARD® 1500 Series is an acid-
 resistant, pore-sealing agent chosen to resist
 corrosive elements.

- Resistant up to 1,500 hours of Salt Spray
 Tests ASTM B-117
- Resistant to 15 cycles of Acid Rain Test
 DIN 50018, SFW 2.0L
- All Zinc-plated screws conform to ASTM
 B-633

All products manufactured for TITAN Fastening Systems are of a non-chemically hazardous nature.